

modumould

MOULDINGS



Moulding the Future

POOL COVING

LOW MAINTENANCE DECKING SYSTEM

As the name suggests, the **modumould** range consists of a spectrum of modular products which, through unique design and assembly innovations, results in quick installation, reducing erection time on site, and minimising disruptions to the work place.

Made from **resocrete** MOD 38, a fire rated formulation with their superior structural and aesthetic characteristics, these systems result in low maintenance products, with all the beauty and deco-enhancing characteristic unique to the **resocrete** range of products.

Available in a wide range of natural stone colours, or colour pigmented options, our **modumould** pool coving meets all the exacting requirements and Industry Standards.

Reeded to ensure maximum water runoff and anti-slip surfacing, and with **resocrete's** superior abrasion resistant characteristics, these Solid Surface Covings should be fitted **resocrete** 1:1 epoxy.

As the Covings are manufactured out of the Mod 38 compound which is a very hard wearing substrate, we advise that all cutting be carried out with either a diamond blade or a masonry blade fitted to the cutting machine.




MODUMOULD COVINGS BEING FITTED TO SWIMMING POOL - LA LUCIA



MODUMOULD POOL COVING SHOWING REEDED SURFACE FOR WATER DRAINAGE

Technical Specifications

- . Coving Width 95mm
- . Coving Length 1000mm
- . Grip Edge Width 42mm
- . Grip Edge Thickness 60mm
- . Mod 38 Natural Stone, resin bonded formulation
- . 43 Mpa flexural strength
- . 110 Mpa compressive strength)
- . Impervious to water
- . Outstanding UV resistance
- . High shock absorbency
- . Resistant to biological attack
- . Maintenance free
- . Available in a wide range of natural stone colours
- . Reeded surface for maximum water run-off

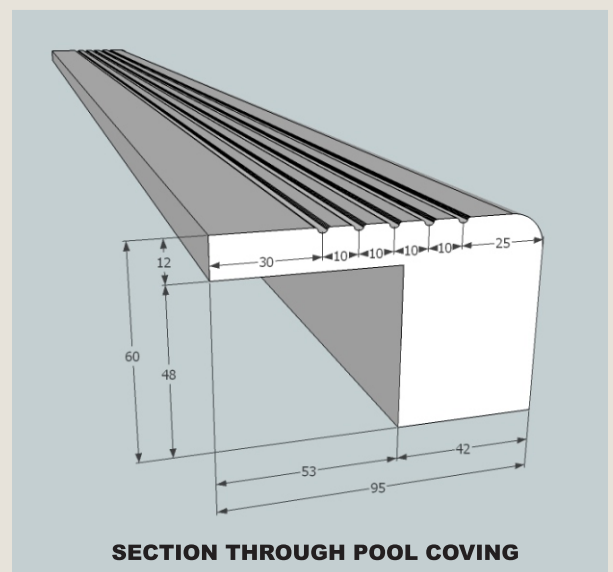

SECTION THROUGH POOL COVING

Visit our web-site at www.resocrete.co.za

Copyright - all information contained in this document is copyright and is the property of Resocrete